


# Supporto DVR per HDD da 2 TB Supporto per scheda SD Software remoto, fotocamera 720p 1080P opzionale per il collegamento


## Specifiche del prodotto:

progetto		parametro
sistema operativo		Linux
linguaggio		Inglese / cinese / personalizzato
Compressione video		Compressione H.264
OSD		Sovrapposizione di data e ora e ID veicolo e altre informazioni
GUI	GUI	Impostare i parametri di sistema con il telecomando
Sistema di registrazione video	Ingresso video	Ingresso 4CH 1080P / 960P / 720P AHD, connettori Aviation, 1,0Vp-p, 75Ω
	Uscita video	1 CVBS, 1.0Vp-p, 75Ω, aviazione, supporto 1CH a schermo intero, visualizzazione schermata 4CH
	Anteprima	Supporta l'anteprima di 1 canale e 4 canali. Manuale di supporto / allarme a schermo intero anteprima a schermo intero
	Risoluzione	720P / D1 / HD1 / CIF, MAX: 4 720P e 4 D1
	Qualità dell'immagine	Livello 1-4, il livello 1 è il livello più alto.
	Standard video	PAL: 100f / s, CCIR625 line, 50field; NTSC: 120f / s, linea CCIR525, 60 campi; CIF: 256 Kbps ~ 1,5 Mbps, qualità video a 8 livelli opzionale; HD1: 600 Kbps ~ 2,5 Mbps, qualità video a 8 livelli opzionale; D1: 800 Kbps ~ 3 Mbps, qualità video a 8 livelli opzionale; 720P: 4Mbps-6Mbps, qualità video multi-livello opzionale
Audio	Modalità di registrazione	Dopo aver acceso le impostazioni predefinite per la registrazione automatica. Supporta la registrazione via timer, la registrazione di trigger allarme e la registrazione manuale.
	Ingresso audio	Ingresso spina aeronautica 4CH
	Uscita audio	2CH, il pannello frontale si collega alle cuffie, il pannello posteriore si collega al BNC
compressione		Compressione G.726, velocità 8KB / s
Ingresso allarme		Ingresso allarme 7CH, ingresso 1CH AD, ingresso velocità impulso, collegamento allarme
Uscita allarme		2 uscite di allarme, supporto per sensore di allarme luce / suono, olio / spegnimento
interfaccia		Connessione pubblicitaria 3CH RS232, POS / sensore carburante / LED
		Interfaccia 1CH 485, collegare la telecamera PTZ
Trasmissione wireless		Supporta la trasmissione 3G integrata, WCDMA, CDMA2000, GPRS, EDGE; Modulo 4G integrato opzionale, TDD-LTE, FDD-LTE
Posizione GPS		Supporta il modulo GPS / BD integrato

Conservazione	disco rigido	Massimo 2,5 "disco rigido da 1TB
	scheda SD	Record di immagine della scheda SD massimo da 128 GB per la sicurezza dei dati
	aggiornato	Supporta aggiornamento USB, aggiornamento scheda SD, aggiornamento remoto OTA
	formato del file	H.264
	File system	Speciale file system FAT32
	USB	Interfaccia USB sul disco U di backup dati del pannello anteriore, disco fisso
Registra replay	Ricerca video	Ricerca per tempo di registrazione / tipo di registrazione, ecc.
	riproduzione	Max supporta anche 4CH Replay / Stop / Fast / Slow
		Supporto per riproduzione in avanti e indietro di x 2, x 4, x 8, x 16.
Sicurezza		Utente / amministratore 2 password diverse
Caratteristiche opzionali	Chiamate vocali	Supporta le altre chiamate vocali
	Trasmissione vocale TTS	Supporta la riproduzione vocale TTS.
	Estensione seriale	Supporta schermo pubblicitario a LED, sensore livello olio, POS, emittenti stazioni degli autobus, OBD auto e altre apparecchiature esterne
Tensione e & Energia	Gestione dell'energia	Ampia tensione. Supporto sincronizzazione / ritardo
	Tensione di ingresso	DC: + 6V - + 36V
	La tensione di uscita	+ 12V ~ 1,5A, + 5V ~ 1,5A
	energia	Funzionando & It; 5W
ambiente di lavoro	temperatura	-20 °C - +70 °C
	umidità	20% - 80%
altro	dimensione	200 (D) * 187 (W) * 62 (H) mm
	peso	1,90 kg

## Immagine del prodotto:

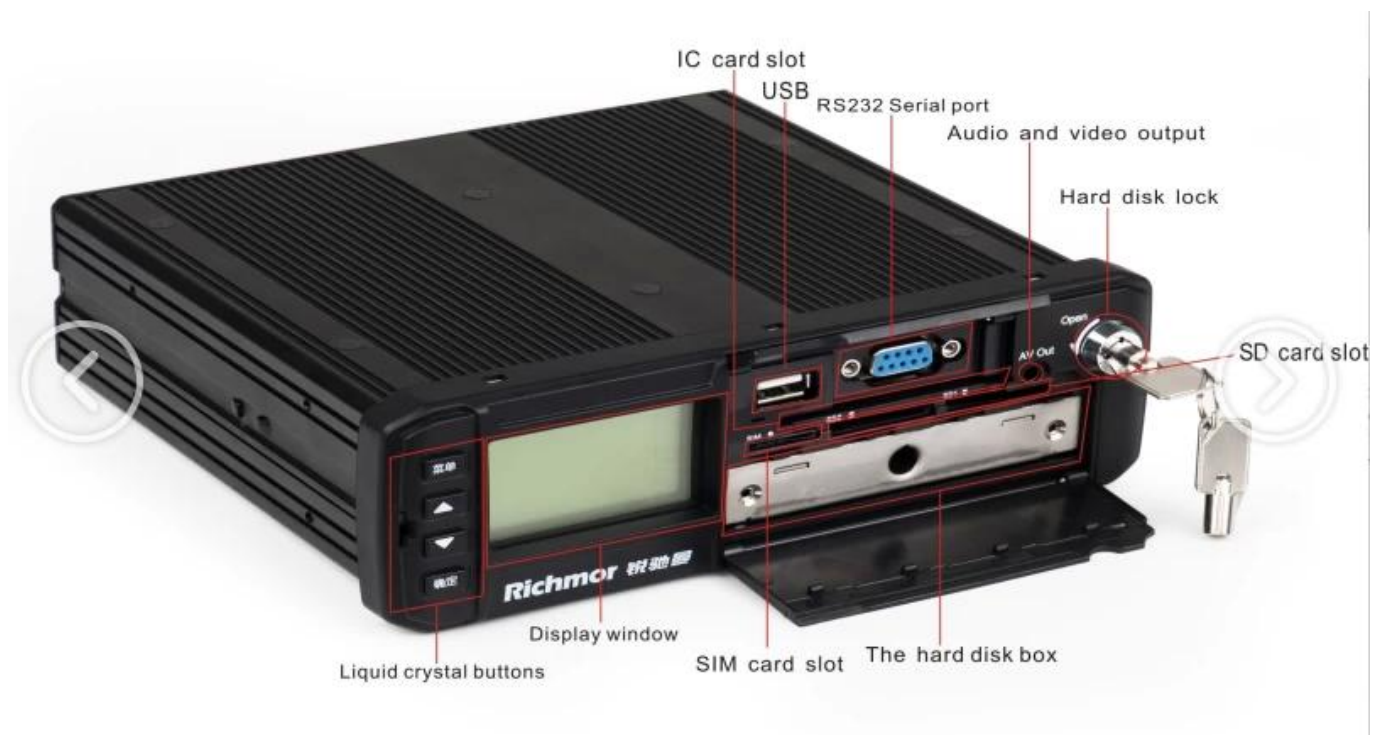

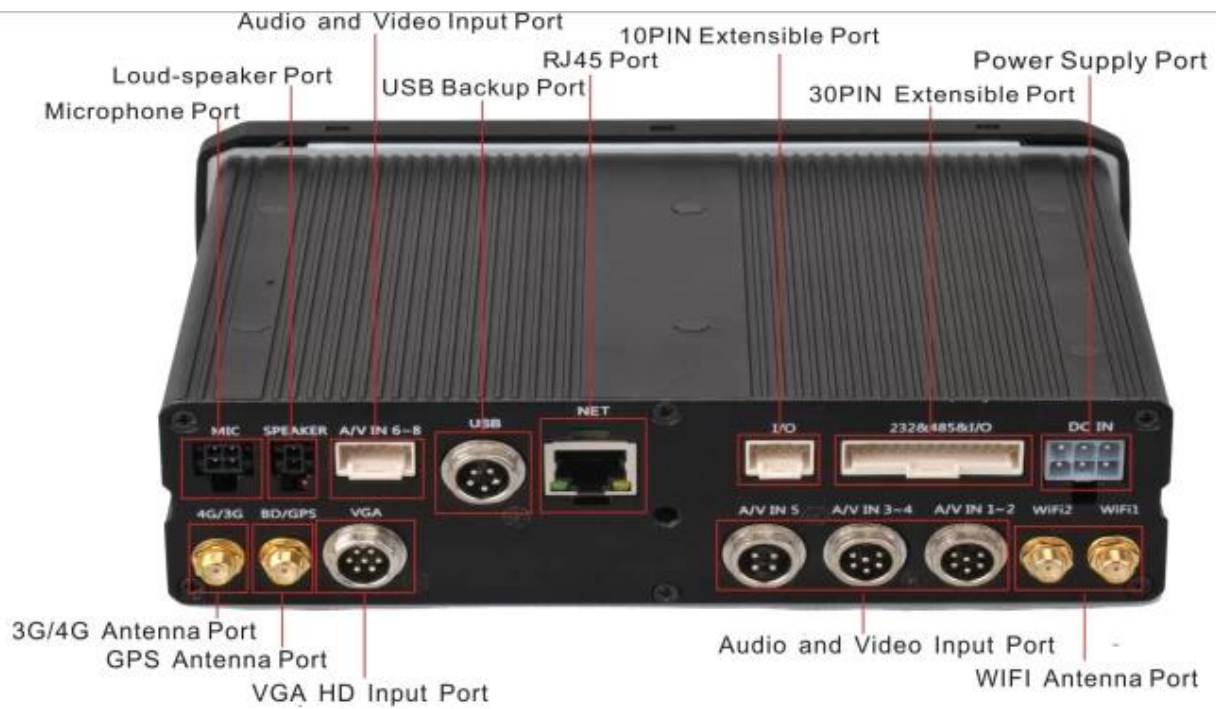


**Richmor** 锐驰曼


Do Our Best To Be Better For You !

## Product Introduction

### Device Series

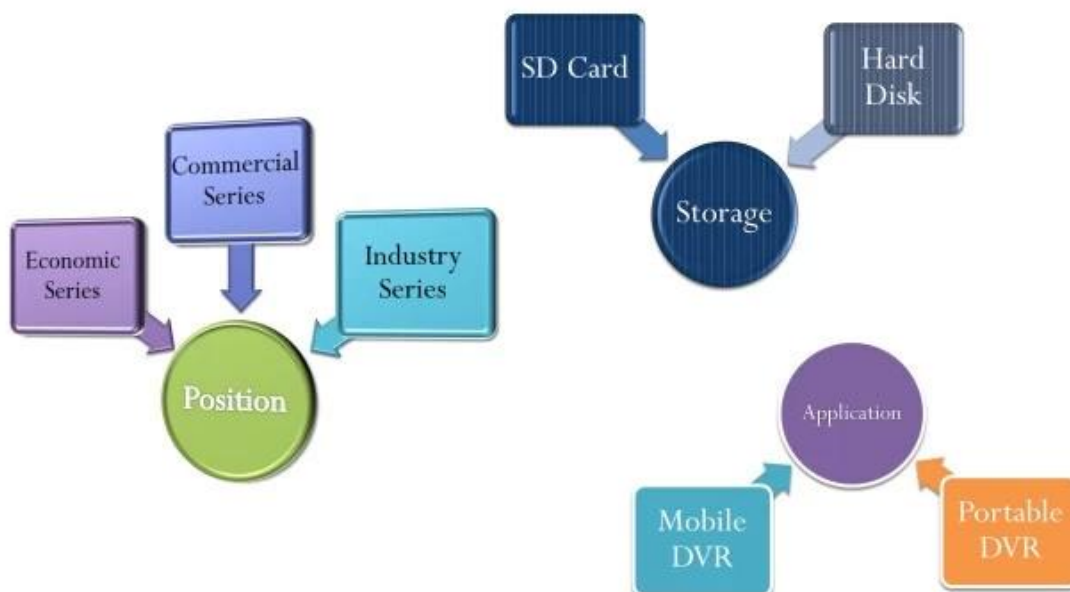

# Product Advantage

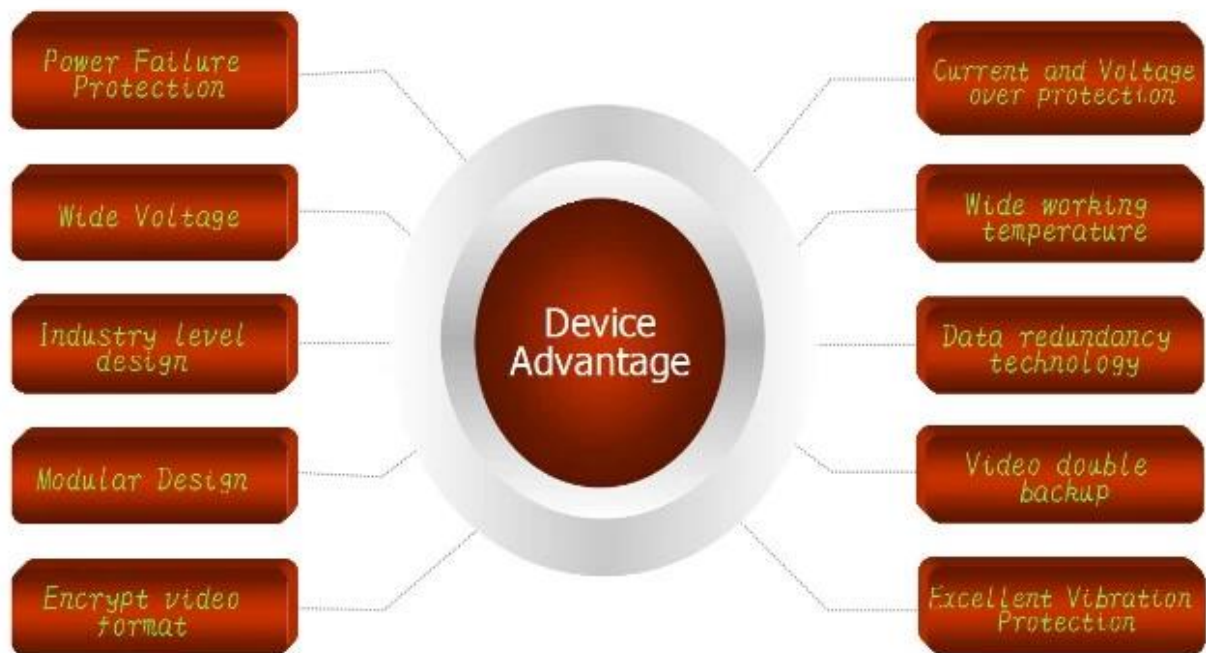


## Interfaccia grafica utente client







Il nostro mdvr supporta PC, telefono cellulare e altri dispositivi mobili di monitoraggio.

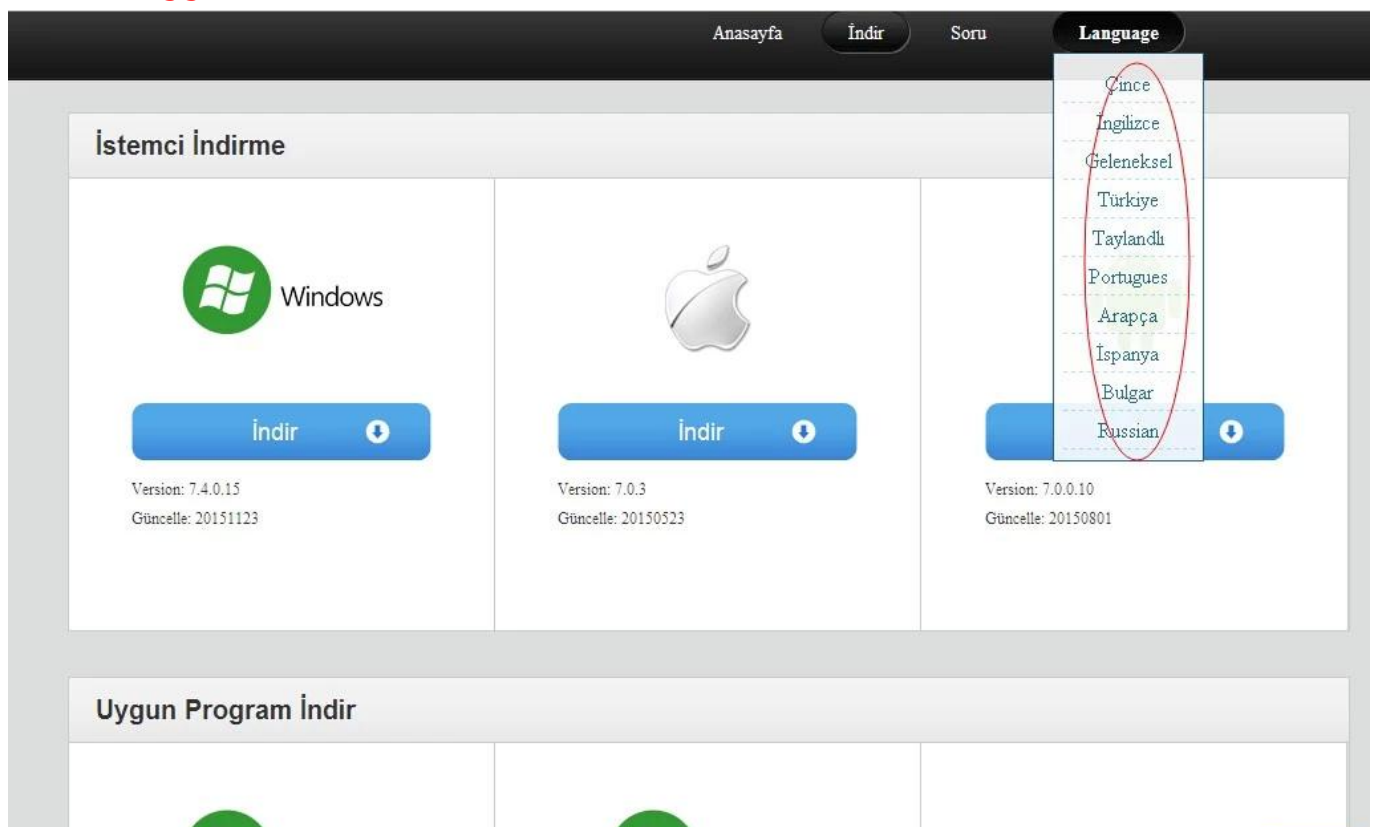

Appliacion

## FUNCTIONS

- Video& Audio real-time monitoring
- Online Vehicle Status
- Satellite Map
- GPS
- Video Storage
- Tracking Display
- Intercom
- Fuel Sensor
- G-Sensor
- Temperature-Sensor

**Richmor**

OEM & ODM Service

Brasil World Cup Supplier  
[www.rcmcctv.com](http://www.rcmcctv.com)



Truck  
Coach



School Bus  
Bus



Police Car  
Taxi



Support  
All Vehicles

certificato

VERIFICATION OF CONFORMITY	
 <b>Verification of Conformity</b> Reference No.: LC01000000010	
<b>Responsible Party</b>	Shenzhen Richcore Technology Development Co., LTD.
<b>Address</b>	3/F No. 101 West Langshan Road, Longhua New District, Shenzhen, China
<b>Product</b>	Cables
<b>Model No.</b>	RCH-PCVH, RCH-PCVH, RCH-LPVH, RCH-LPVH, RCH-IMPAL, RCH-IMPAL, RCH-SAL, RCH-SAL, RCH-AHL, RCH-AHL, RCH-JAHL, RCH-JAHL, RCH-ABHL, RCH-ABHL, RCH-ESLH, RCH-ESLH, RCH-C245SBL
<b>Trade Mark</b>	Richcore
<b>Standards</b>	CCC CB-AT P001 in Rule Book B, IEC61140 EN61340-2008
<b>Important note:</b>	
This device is in compliance with part 11 of the FCC Rules and Regulations for safety hazardous devices. Declaration of EMF analysis is based on the following key assumptions: (1) This device may cause harmful interference; and (2) this device shall accept all electromagnetic interference, including man-made, that is a reasonable operational requirement. It will conform to the applicable FCC Rules and Regulations. The notation of voluntary acceptance is in accordance to the most accurate measurement available to date; and that all necessary steps have been followed to ensure that all evaluation units of the same equipment will continue to comply with the Federal Communications Commission's requirements.	
  <b>Manager</b> April 10, 2012	
Shenzhen LCT Compliance Testing Laboratory Ltd #1, Anping Industrial Park, Pingtan Town, Baoan Dist., Shenzhen Guangdong, China Tel: +86(0)755-82597100 <a href="http://www.lct.com.cn">http://www.lct.com.cn</a>	

VERIFICATION OF CONFORMITY

## Verification of Conformity

Reference No.: L2318M000119

Responsible Party	Shenzhen Warner Technology Development Co., Ltd.
Address	3F No.8 West Longgang Road, Longhua New District, Shenzhen, China
Product	Bottle CRK
Model No.	RCH-B000000, RCH-B000001, RCH-B000002, RCH-B000003, RCH-B000004, RCH-SF000, RCH-SF001
Trade Mark	Schneider
Standards	FCC ID# A74017 10 September 2014, FCC OLA 2006

### Important notes:

This document is in accordance with Part 15 of the FCC Rules and Regulations for radio frequency devices. Operation of the product is subject to the following two conditions:  
(1) This device may not cause harmful interference; and  
(2) This device must accept any interference received, including interference that may cause undesired operation.  
We warrant to customers in the applicable FCC Rules and Regulations. The normal operating mode in accordance to this report assumes measurement conditions possible, and that all necessary steps have been estimated to ensure that all production units of the same equipment will continue to comply with the Federal Communications Commission's requirements.

Manager  
April 15, 2017

Shenzhen LCC Compliance Testing Laboratory Ltd.  
No. 1 Jingxian Industrial Park, Jingxin Road, Baiman Subd., Bao'an District, Shenzhen,  
Guangdong, China  
Tel: +86-(0)-755-83241233  
<http://www.LCC.com.cn>

E-mail: [shenwaner@lcc-test.com](mailto:shenwaner@lcc-test.com)  
Fax: +86-(0)-755-83241233

# **CERTIFICATE OF CONFORMITY**



## **CERTIFICATE of Conformity**

Reference No.: **1-23-018-01475**

<b>Applicant:</b>	<b>Shenzhen Elicitor Technology Development Co., LTD.</b>
<b>Address:</b>	<b>2/F Yu-Kai Road Longgang Road, Longgang New District, Shenzhen, China</b>
<b>Product:</b>	<b>Shenke 300S</b>
<b>Model(s):</b>	<b>HCN-M0000A, HCN-M0000B, HCN-M0000C, HCN-M0000D, HCN-M0000E, HCN-M0000F, HCN-M0000G, HCN-M0000H</b>
<b>Trade Mark:</b>	<b>Shenke</b>

The certified products have been tested by us with the latest procedure and found in compliance with the following European Directives:

**The EMC Directive 2004/108/EC:**  
**EN 55022, EN 55024, EN 55034, EN 55035**

The tests were performed in normal operating mode. The test results apply only to the particular sample tested and to the specific mode tested on. This certificate applies specifically to the sample investigated in our test laboratory number only.

The CE marking on the product can be affixed to the product after presentation of satisfactory assessment.

(This relevant Declaration has to be attached)





Manager  
(April 16, 2013)

(Shenzhen) UKAS Compliance Testing Laboratory Ltd.  
 17, Jingnan Industrial Park, Xixiang Road, Xixiang Street, Bao'an District, Shenzhen  
 Guangdong, China  
 Tel: 86(755) 83271151  
 Fax: 86(755) 83271152  
 E-mail: ukas@ukas-cti.com.cn  
 Web: www.ukas-cti.com.cn

[illegible]

		<b>CERTIFICATE</b> of Conformity 2015/0001 Declaration of Negative Evidence	
		Reference No.: <b>LCF 2015000078</b>	
When issued as attached, the supplier certifies compliance with the requirements of Commission Decision of 17 July 2015 amending Directive 2011/65/EU.			
Applicant	Shenzhen Etekwin Technology Development Co., Ltd.		
Address	3F Huaili West Longgang Road, Longhua New District, Shenzhen, China		
Trade Mark	Etekwin		
Product	Camera		
Model(s)	R00M-P070A, R00M-P070B, R00M-P070C, R00M-P070E, R00M-P070F, R00M-P070G, R00M-P070H, R00M-P070I, R00M-P070J, R00M-P070K, R00M-P070L, R00M-P070M, R00M-P070N, R00M-P070O, R00M-P070P, R00M-P070Q, R00M-P070R, R00M-P070S, R00M-P070T, R00M-P070U, R00M-P070V, R00M-P070W, R00M-P070X, R00M-P070Y, R00M-P070Z, R00M-P070AA, R00M-P070AB, R00M-P070AC, R00M-P070AD, R00M-P070AE, R00M-P070AF, R00M-P070AG, R00M-P070AH, R00M-P070AI, R00M-P070AJ, R00M-P070AK, R00M-P070AL, R00M-P070AM, R00M-P070AN, R00M-P070AO, R00M-P070AP, R00M-P070AQ, R00M-P070AR, R00M-P070AS, R00M-P070AT, R00M-P070AU, R00M-P070AV, R00M-P070AW, R00M-P070AX, R00M-P070AY, R00M-P070AZ, R00M-P070BA, R00M-P070BB, R00M-P070BC, R00M-P070BD, R00M-P070BE, R00M-P070BF, R00M-P070BG, R00M-P070BH, R00M-P070BI, R00M-P070BJ, R00M-P070BK, R00M-P070BL, R00M-P070BM, R00M-P070BN, R00M-P070BO, R00M-P070BP, R00M-P070BQ, R00M-P070BR, R00M-P070BS, R00M-P070BT, R00M-P070BU, R00M-P070BV, R00M-P070BW, R00M-P070BX, R00M-P070BY, R00M-P070BZ, R00M-P070CA, R00M-P070CB, R00M-P070CC, R00M-P070CD, R00M-P070CE, R00M-P070CF, R00M-P070CG, R00M-P070CH, R00M-P070CI, R00M-P070CJ, R00M-P070CK, R00M-P070CL, R00M-P070CM, R00M-P070CN, R00M-P070CO, R00M-P070CP, R00M-P070CQ, R00M-P070CR, R00M-P070CS, R00M-P070CT, R00M-P070CU, R00M-P070CV, R00M-P070CW, R00M-P070CX, R00M-P070CY, R00M-P070CZ, R00M-P070DA, R00M-P070DB, R00M-P070DC, R00M-P070DD, R00M-P070DE, R00M-P070DF, R00M-P070DG, R00M-P070DH, R00M-P070DI, R00M-P070DJ, R00M-P070DK, R00M-P070DL, R00M-P070DM, R00M-P070DN, R00M-P070DO, R00M-P070DP, R00M-P070DQ, R00M-P070DR, R00M-P070DS, R00M-P070DT, R00M-P070DU, R00M-P070DV, R00M-P070DW, R00M-P070DX, R00M-P070DY, R00M-P070DZ, R00M-P070EA, R00M-P070EB, R00M-P070EC, R00M-P070ED, R00M-P070EE, R00M-P070EF, R00M-P070EG, R00M-P070EH, R00M-P070EI, R00M-P070EJ, R00M-P070EK, R00M-P070EL, R00M-P070EM, R00M-P070EN, R00M-P070EO, R00M-P070EP, R00M-P070EQ, R00M-P070ER, R00M-P070ES, R00M-P070ET, R00M-P070EU, R00M-P070EV, R00M-P070EW, R00M-P070EX, R00M-P070EY, R00M-P070EZ, R00M-P070FA, R00M-P070FB, R00M-P070FC, R00M-P070FD, R00M-P070FE, R00M-P070FF, R00M-P070FG, R00M-P070FH, R00M-P070FI, R00M-P070FJ, R00M-P070FK, R00M-P070FL, R00M-P070FM, R00M-P070FN, R00M-P070FO, R00M-P070FP, R00M-P070FQ, R00M-P070FR, R00M-P070FS, R00M-P070FT, R00M-P070FU, R00M-P070FV, R00M-P070FW, R00M-P070FX, R00M-P070FY, R00M-P070FZ, R00M-P070GA, R00M-P070GB, R00M-P070GC, R00M-P070GD, R00M-P070GE, R00M-P070GF, R00M-P070GG, R00M-P070GH, R00M-P070GI, R00M-P070GJ, R00M-P070GK, R00M-P070GL, R00M-P070GM, R00M-P070GN, R00M-P070GO, R00M-P070GP, R00M-P070GQ, R00M-P070GR, R00M-P070GS, R00M-P070GT, R00M-P070GU, R00M-P070GV, R00M-P070GW, R00M-P070GX, R00M-P070GY, R00M-P070GZ, R00M-P070HA, R00M-P070HB, R00M-P070HC, R00M-P070HD, R00M-P070HE, R00M-P070HF, R00M-P070HG, R00M-P070HH, R00M-P070HI, R00M-P070HJ, R00M-P070HK, R00M-P070HL, R00M-P070HM, R00M-P070HN, R00M-P070HO, R00M-P070HP, R00M-P070HQ, R00M-P070HR, R00M-P070HS, R00M-P070HT, R00M-P070HU, R00M-P070HV, R00M-P070HW, R00M-P070HX, R00M-P070HY, R00M-P070HZ, R00M-P070IA, R00M-P070IB, R00M-P070IC, R00M-P070ID, R00M-P070IE, R00M-P070IF, R00M-P070IG, R00M-P070IH, R00M-P070II, R00M-P070IJ, R00M-P070IK, R00M-P070IL, R00M-P070IM, R00M-P070IN, R00M-P070IO, R00M-P070IP, R00M-P070IQ, R00M-P070IR, R00M-P070IS, R00M-P070IT, R00M-P070IU, R00M-P070IV, R00M-P070IW, R00M-P070IX, R00M-P070IY, R00M-P070IZ, R00M-P070JA, R00M-P070JB, R00M-P070JC, R00M-P070JD, R00M-P070JE, R00M-P070JF, R00M-P070JG, R00M-P070JH, R00M-P070JI, R00M-P070JJ, R00M-P070JK, R00M-P070JL, R00M-P070JM, R00M-P070JN, R00M-P070JO, R00M-P070JP, R00M-P070JQ, R00M-P070JR, R00M-P070JS, R00M-P070JT, R00M-P070JU, R00M-P070JV, R00M-P070JW, R00M-P070JX, R00M-P070JY, R00M-P070JZ, R00M-P070KA, R00M-P070KB, R00M-P070KC, R00M-P070KD, R00M-P070KE, R00M-P070KF, R00M-P070KG, R00M-P070KH, R00M-P070KI, R00M-P070KJ, R00M-P070KK, R00M-P070KL, R00M-P070KM, R00M-P070KN, R00M-P070KO, R00M-P070KP, R00M-P070KQ, R00M-P070KR, R00M-P070KS, R00M-P070KT, R00M-P070KU, R00M-P070KV, R00M-P070KW, R00M-P070KX, R00M-P070KY, R00M-P070KZ, R00M-P070LA, R00M-P070LB, R00M-P070LC, R00M-P070LD, R00M-P070LE, R00M-P070LF, R00M-P070LG, R00M-P070LH, R00M-P070LI, R00M-P070LJ, R00M-P070LK, R00M-P070LL, R00M-P070LM, R00M-P070LN, R00M-P070LO, R00M-P070LP, R00M-P070LQ, R00M-P070LR, R00M-P070LS, R00M-P070LT, R00M-P070LU, R00M-P070LV, R00M-P070LW, R00M-P070LX, R00M-P070LY, R00M-P070LZ, R00M-P070MA, R00M-P070MB, R00M-P070MC, R00M-P070MD, R00M-P070ME, R00M-P070MF, R00M-P070MG, R00M-P070MH, R00M-P070MI, R00M-P070MJ, R00M-P070MK, R00M-P070ML, R00M-P070MM, R00M-P070MN, R00M-P070MO, R00M-P070MP, R00M-P070MQ, R00M-P070MR, R00M-P070MS, R00M-P070MT, R00M-P070MU, R00M-P070MV, R00M-P070MW, R00M-P070MX, R00M-P070MY, R00M-P070MZ, R00M-P070NA, R00M-P070NB, R00M-P070NC		

**CERTIFICATE OF CONFORMITY**

 <b>CERTIFICATE</b> <b>of Conformity</b> <b>ISSUED BY: Notifier of Competence</b> <b>Reference No.: LU0104100818</b>	
When tested as specified, the submitted sample complies with the requirements of Commission Decision of 21 July 2011 amending Directive 2011/65/EU.	
<b>Applicant:</b>	Shenzhen Pictorial Technology Development Co., LTD.
<b>Address:</b>	3F No. 34 West Longgang Road, Longhua New District, Shenzhen, China
<b>Trade Mark:</b>	Pictorial
<b>Product:</b>	Screen 1018
<b>Model(s):</b>	WUM-INDIGLO, WUM-INDIGLO, WUM-SPHAR, WUM-SPHAR, WUM-SPHAR, WUM-SPHAR, WUM-SPHAR, WUM-SPHAR, WUM-SPHAR, WUM-SPHAR
The test report is issued on the Applicant's behalf in its General Conditions of Service printed on sheet. Attention is drawn to the limitations of liability, indemnification and arbitration clause within Section 7. The results shown in this test report refer only to the sample(s) tested under defined conditions. This Test Report cannot be reproduced, copied or full, without prior written permission of the Notifier.	
Other relevant documents have to be obtained.	
<h1>RoHS</h1>	
 <i>Shen Jie</i> Manager April 16, 2013	
Shenzhen UL10 Competence Testing Laboratory Ltd. 20/F, Hengfeng Industrial Park, Tanggou Road, Nanshan Dist., Nanshan District, Shenzhen, Guangdong, China Tel: +86-755-83291100 http://www.ul10.com.cn	
Fax: +86-755-83291102 Email: shenjie@ul10.com.cn	

## Azienda e fabbrica





**Richmor**

**OEM & ODM Service**

**Brasil World Cup Supplier**





esposizione:



**Richmor**

CPSE2012 in Shenzhen



CPSE2013

10.29-10.31

4 Booth we have

Welcome you !!!



CPSE2012-- Guangdong TV Report-Shenzhen Richmor



**Non esitare a contattarci per maggiori dettagli ....**

Best Regards  
Amily Zhang

**HAND US YOUR TRUST, OFFER YOU OUR BEST!!!**

**Shenzhen Richmor Technology Development Co.,LTD**

Email: [overseasales-2@rcmcctv.com](mailto:overseasales-2@rcmcctv.com)

Skype: rcmcctvsales2

QQ: 2355778097

MB/Whatsapp: +86 18929314790

Website: <http://www.richmor.net/>

ADD: 6th Floor, F Building, Xinzhi Industrial Park, Yangmei,Bantian,Longgang, Shenzhen

