

# Richmor Portable Video Recorder with 3G GPS WIFI For Brasil World Cup

**RCM-SP5800**

## Richmor Portable Video Recorder Advantage

1. **3G GPS WIFI G-sensor TF Card Portable DVR;**
2. **SOS Button for Alarm Recording;**
3. **Picture snap button;**
4. PTT Function, device and device communication;
5. Intercom Function, officer and police communication;
6. 8 Hours working time

## Picture



Parameter		
Items	Device parameters	Performance index
System	Operation system	Linux
	Separate design	Main device: work independently to realize local record Auxiliary device: GPS / 3G, backup battery
	Graphic operation interface	Use buttons to complete the setting of various parameters
	Security management	User password management

Video	Video input	Built-in camera lens, angle of visibility: 70°, CMOS sensor
	OSD	Time & date, device ID, GPS, etc.
	Compression	H.264. Hisilicon high performance processor is adopted.
	Video resolution	VGA by default, QVGA optional
	Video Bit rate QVGA	QVGA: 400Kbps ~ 1.5Mbps, 4 levels of bit rate optional
	Video Bit rate VGA	VGA: 1000kbps ~ 2Mbps, 4 levels of bit rate optional
	Preview function	Real time, record video preview
Audio	Dual stream	Support
	Audio input	Built-in MIC
	Audio output	Built-in speaker, >1W
Recording	Compression	G.726
	Storage media	Micro-SD card, support 1G ~ 32G
	File format/system	ASF record file format, FAT32 file system
	Recording mode	Startup recording by default, support manual recording
	Recording search	Search recording video files by time, type, etc.
USB Interface	Recording Playback	Support fast forward, fast backward, play, pause, support 2, 4, 8, 16 times speed fast forward or fast backward, support playback of file by time
	Host Access	Can Expand One For USB Disk Backup
Network interface	Wireless transmission	Built-in 3G wireless transmission module, WCDMA, CDMA2000, TD-SCDMA system optional; Compatible with GPRS, EDGE;
Extend Interface	Intercom	Can Expand Intercom Module Inside
Screen parameters	Size	2.4 inch
	Type	TFT
	Resolution	480*234
Upgrade	System upgrade	Support Micro-SD card upgrade
Working environment	Temperature	-20°C ~ +50°C
	Humidity	20% to 80%
Dimension	Main device	50(W) x90(H) x28(D) mm
	Auxiliary device	70(W) x110(H) x28(D) mm
Weight	Main device	Net weight: 95g, Gross weight: 307.5g
	Auxiliary device	Net weight: 238g, Gross weight: 352g



## Package



Richmor Brand Package



Standard Package






South Africa



Argentina




Czech Republic



Brazil



Russia

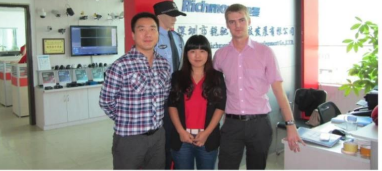

India



Turkey



Mexico



Saudi Arabia

